


## Application: Air filter System – particulate matter detection

### Free light path – clean air

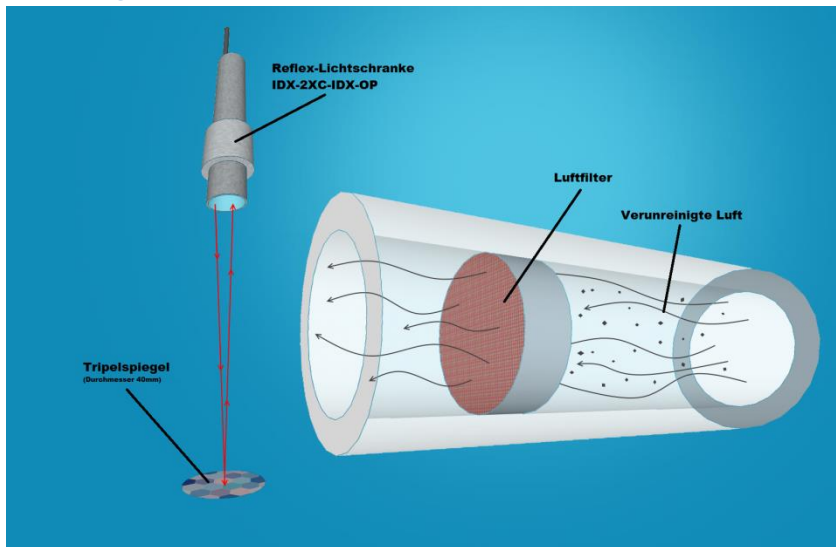

### Specification:

The state of an air filter is monitored with the aid of the ISD-2XC-IDX-OP retroreflective light barriers with teach-in function and a triple mirror (40mm). If the filter breaks, the retroreflective light barrier detects the dirt particles in the air.

For further information, please contact one of our sales representatives.

### Interrupted light path – contaminated air

